

INSTRUCTION MANUAL FOR PINHOLES LENS WV-LP6

How to install the lens

- (1) Make sure the Lens Selection Switch on the camera is set at DC position. (Fig. 1)

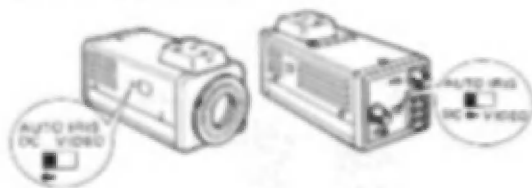


Fig. 1

CAUTION:

Always set the flange-back adjusting ring to fully clockwise (C-mount side) by loosening screws on the ring before mounting the lens. The inner glass and CCD image sensor might be damaged by the lens otherwise.

- (2) Mount the lens by turning it clockwise onto the lens mount of the camera.
- (3) Connect the lens cable to the Auto Iris Lens Connector on the side of the camera. (Fig. 2)




Fig. 2

- (4) Loosen screws on the flange-back adjusting ring. (Turn the flange-back adjusting ring to the desired position.)

CAUTION:

Do not turn this ring too much counter-clockwise as this might damage the inner glass and CCD image sensor.

Tighten the screw on the flange-back adjusting ring. (Fig. 3)


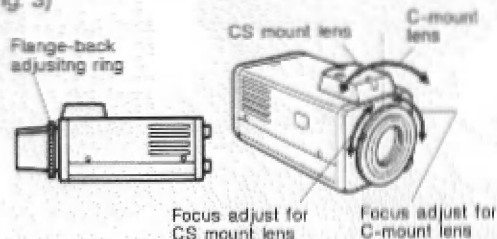


Fig. 3

Specification Comparison

Specifications		Models	WV-LP6 (Pinhole)
Image Size			$\phi 8$ mm (6.4(H) x 4.8(V) mm)
Focal Length			6.2 mm
Maximum Aperture Ratio			1 : 2
Angular Field of View	H		55.3°
	V		42.4°
Focusing Range			By the combination of camera and lens
Mount			Special C-mount (CS-mount, 1"-32UN)
Filter Size			—
Ambient Operating Temperature			-22°F - 140°F (-30°C - +60°C)
Dimensions			2-1/16"(W) x 1-11/16"(H) x 3-1/16"(D) (52.5(W) x 43(H) x 78.5(D) mm)
Weight			0.2 lbs. (80 g)

- Dimensions and weight indicated are approximate.
- Specifications are subject to change without notice.



Panasonic

Communications & Systems Company

Division of Matsushita Electric Corporation of America

CLOSED CIRCUIT VIDEO EQUIPMENT DIVISION

Executive Offices: One Panasonic Way, Secaucus, New Jersey 07094

Regional Offices

Northeast Region: 50 Meadowland Parkway, Secaucus, NJ 07094 (201) 348-7303
Southeast Region: 1854 Shackleford Court, Suite 115, Norcross, GA 30093 (404) 925-8835
Midwest Region: 425 E. Algonquin Road, Arlington Heights, IL 60005 (708) 640-5168
Southwest Region: 4500 Amon Carter Blvd., Ft. Worth, TX 76155 (817) 685-1117
Western Region: 6550 Katella Ave., Cypress, CA 90630 (714) 373-7265

MATSUSHITA ELECTRIC OF CANADA LIMITED

5770 Ambler Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park, 65th Infantry, Ave. KM. 9.5 Carolina, Puerto Rico 00630 (809) 750-4300